

Activated carbon adsorber ATCN 45

Rev 01_1024

Technical data sheet

Page 1 of 2

Nominal capacity (based on suction conditions 1 bar (a), 20°C)	Unit	Design data
Volume flow inlet	m³/h	480
Volume flow outlet	m³/h	480
Compressed air inlet temperature	°C	35
Working pressure	bar g	7
Residual oil content	mg/m³	< 0,003

General data	Unit	Design data
Maximum operating pressure	bar g	16
Minimum operating pressure	bar g	4
Maximum inlet temperature	°C	50°C (25° eff.)
Ambient temperature minimum	°C	2

Norms and key figures	Unit	Design data
Pressure vessel standard		2014/68/EU
Category		III
Module	Type	H
Fluid group		2
Testing pressure	bar g	24

Scope of supply	Unit	Design data
Ready-to-operate adsorption dryer	Type	ATCN 45
Final filter	Type	APF133DMF
Filling	Type	Activated carbon dedusted
Oil indicator A4000		yes

Options	Unit	Design data
Preliminary filter	Type	APF133SMA

Activated carbon adsorber ATCN 45


Rev 01_1024

Technical data sheet

Page 2 of 2

Dimensions and weights	Unit	Design data
A	mm	1639
B (in)	mm	1610
B (out)	mm	1145
C	mm	696
D	mm	700
Nominal size inside the adsorber	Inch	1 1/2"
Connection input	Inch	1 1/2"
Output connection	Inch	1 1/2"
Total weight	Kg	201
Vessel volume	Liter	76

Dimensional drawings

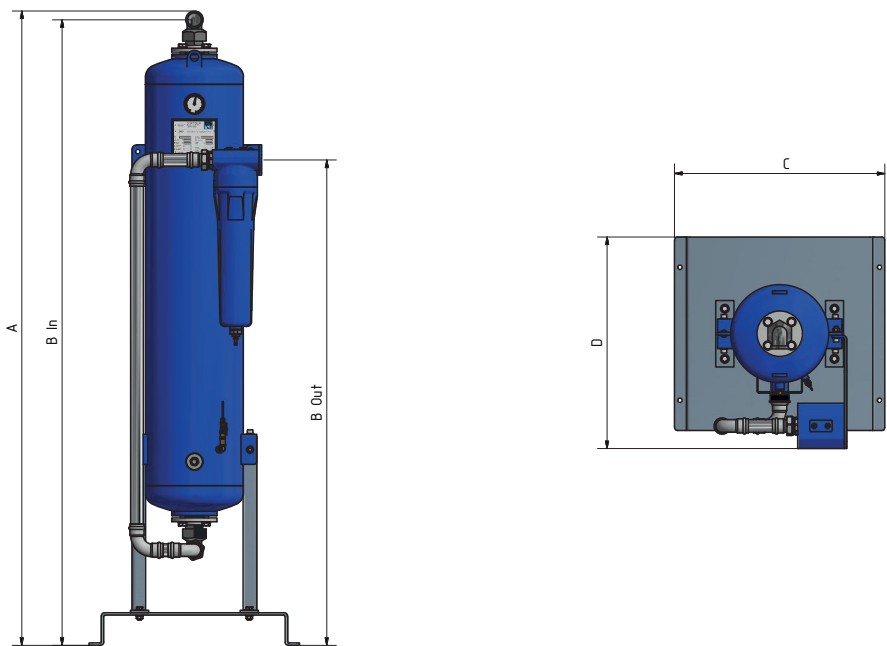

Correction factors										
Inlet temperature										
°C	< 25	25	30	35	38	40	45	48	50	
F(t)	1,2	1,1	1,09	1	0,84	0,78	0,72	0,65	0,58	

Correction factors working pressure																				
bar g	4	4,5	5	5,5	6	6,5	7	7,5	8	8,5	9	9,5	10	10,5	11	11,5	12	12,5	13	13,5
F(p)	0,6	0,7	0,74	0,82	0,89	0,97	1	1,08	1,11	1,16	1,22	1,29	1,36	1,42	1,5	1,57	1,63	1,69	1,75	1,83

Please multiply the capacity with the correction factors in the above table