


Specifications	KON-S5	KON-S13	KON-S28
Capacity	4,2 m³/min	12,7 m³/min	28,3 m³/min
Oil adsorption max	3,1 kg	9,2 kg	20,4 kg
Residual oil content	<10 mg/l	<10 mg/l	<10 mg/l
Mineral lubricants	Yes	Yes	Yes
Synthetic lubricants	Yes (K-type)	Yes (K-type)	Yes (K-type)
Stable emulsions	Yes (K-type)	Yes (K-type)	Yes (K-type)
Connection condensate inlet	4 x 1/2"	4 x 1/2"	4 x 1/2"
Connection water drain	1/2"	3/4"	3/4"
Connection sample collection	1/4"	1/4"	1/4"
Material housing	PE	PE	PE
Type approval	Yes (No. Z-83.5-94)*	Yes (No. Z-83.5-94)*	Yes (No. Z-83.5-94)*

* DIBt Deutsches Institut für Bautechnik

Dimensional drawings

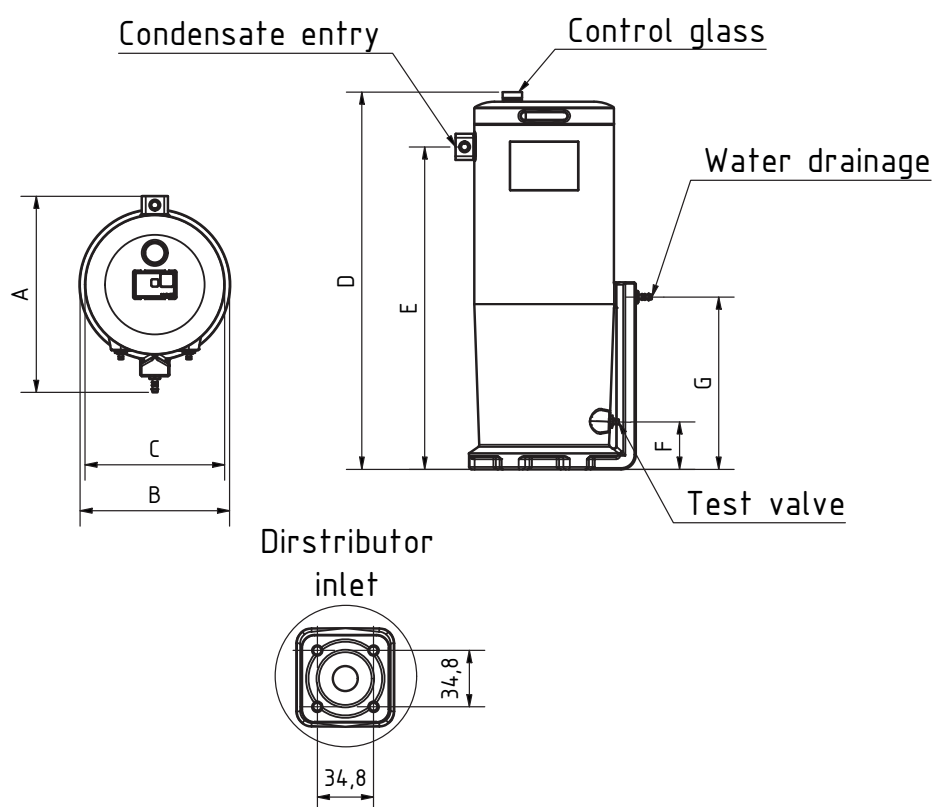

Dimensions & Weight	KON-S5	KON-S13	KON-S28
A in mm	319	404	494
B in mm	220	308	400
C in mm	203	288	377
D in mm	577	777	997
E in mm	465	665	885
F in mm	92	98	98
G in mm	245	355	436
Weight incl. filter set (dry) in kg	3	6	11,5